


To maximize seal performance and durability, System Seals recommends the following finishing values for hydraulic seals.

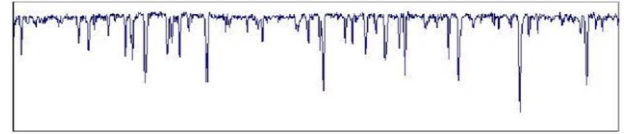

Metric (DIN/ISO specification)

Surface Roughness	Ra	Rt
Sliding Surface	$\leq 0.05 - 0.3 \mu\text{m}$	≤ 3.0
Groove Root	$\leq 1.8 \mu\text{m}$	$\leq 10.0 \mu\text{m}$
Groove Sides	$\leq 3.0 \mu\text{m}$	$\leq 16.0 \mu\text{m}$

Inch

Surface Roughness	RMS
Sliding Surface	8
Groove Root	32
Groove Sides	125

Machining recommendations:

Rods: Ground with non-oriented finish or roller burnishing
 Barrels: Honing and roller burnishing

Hardness:

Heat treat to 45-60HRC to a minimum depth of 0.5mm.

Corrosion Protection:

Hard chrome overlay with coating thickness 30-50 μm .

System Seals, Inc. recommends to not only rely on the above information, but to also measure Rz as well as the profile bearing area ratio "Tp". Knowing the profile bearing area ratio will ensure a surface quality that is optimum for hydraulic seals. The recommendation is as follows:

Rz recommendation (DIN specification): Rz=0.40 to 1.60

Tp should be between 50-90% of the average height value "C=Rz/2" with reference line at C_{ref}=0.

